





**Datasheet**  
**SLAM Splitter Ex 2C & 4C (CEAG)**

<b>Manufacturing date</b>	<b>26.2.2015 -</b>
<b>ATEX &amp; IECEx marking</b>	 Ex II 2 G Ex e d IIC T4 Gb Ex II 2 D Ex tb IIIC T80°C Db
<b>Product description</b>	Explosion protected portable power distribution unit
<b>Temperature classification</b>	T4 (internal) T80 °C (external)
<b>Operating temperature</b>	-20°C ... +40°C
<b>Supply Voltage (min-max)</b>	110V or 230V +/- 6%
<b>Supply Current typical</b>	Max. 16A
<b>Electrical class</b>	Class I
<b>Maximum load</b>	230V 3680W 110V 1760W
<b>Cable</b>	Standard cable H07BQ-F
<b>Plug and socket options</b>	CEAG Ex 230V 2P+E CEAG Ex 110V 2P+E Plug type subject to applicable temperature rating.
<b>Enclosure</b>	Black elastomer, aluminium
<b>Ingress protection</b>	IP66
<b>Weight (with sockets, without cable and plug)</b>	10,5 kg
<b>Warranty</b>	You will find detailed warranty conditions from <a href="http://www.atexor.com/downloads/warranty">www.atexor.com/downloads/warranty</a>

	Dimensions / mm		
	L	W	H
<b>SLAM® Splitter Ex 4C</b>	534	356	313

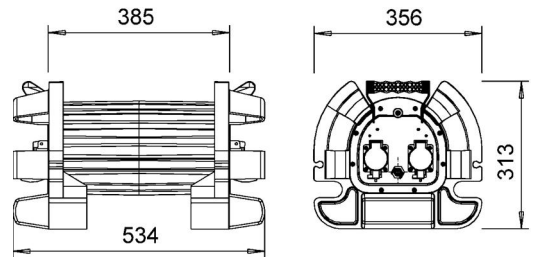

Value Driven Safety



Distributed by: Saurya HSE Pvt Ltd  
 HO: C-112 A Kailash Business Park,  
 Veer Sawarkar Marg, Vikhroli West, Mumbai 400079, India  
 T: +91 22 4065 5555 | E: info@suryahse.com | W: sauryahse.com